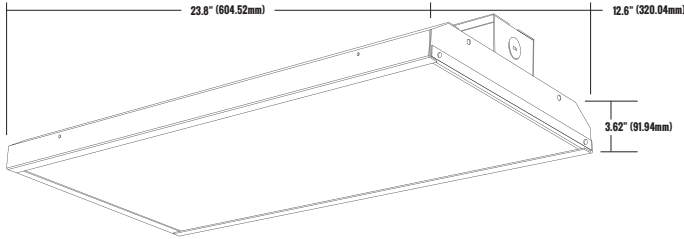


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: HBL2-110U40-WH**
**LED LINEAR HIGH BAY/2FT**


### PRODUCT DESCRIPTION

Etlin-Daniels is pleased to introduce their new LED Linear Highbay offering the HBL2 Series. At only 2 feet in length, these fixtures provide high lumen efficacy, excellent color rendering, flexible mounting options, are damp location rated, and have precision designed, frosted optics. The HBL2 Series offer the very best in performance and energy-efficient solutions for industrial, commercial, retail and sports applications. Further energy savings can be achieved by taking advantage of the installed 0-10V Continuous dimming option.

- Multiple color temperatures available in stock.

### FEATURES

- Compact 2' length
- Frosted lens
- Multiple mounting options
- Wire guard available
- >115LM/W efficacy
- CRI >84
- 50,000hr L70
- cULus certified
- DLC Standard
- 0-10V continuous dimming
- 5 year limited warranty

### PRODUCT SPECIFICATIONS (OPTICAL DATA)

### PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LG	224 CHIPS	111.6M/W	12,282LM	4000K	120°	>84CRI	>85%	AC120~277V	50~60HZ	>85%	>0.95	<15%

### PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
110W	BAKED WHITE ENAMEL/OPAL LENS DIFFUSER	>50,000 HOURS	-30°C~-50°C -22°F~-122°F	-40°C~-80°C -40°F~-176°F	23.8 X 12.6 X 3.62 INCHES (604.5 X 320 X 91.94 MM)	24.80 X 12.95 X 3.85 INCHES (630 X 329 X 98 MM)



### ADDITIONAL INFORMATION

#### INSTALLATION METHOD

V HOOK & CHAIN/PENDANT MOUNT APPLICATIONS

#### FIXTURE COLOR

WHITE ENAMEL/OPAL LENS

#### CONTROL TYPE

0-10V CONTINUOUS DIMMING


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: HBL2-110U40-WH**


**LED LINEAR HIGH BAY/2FT**

**LUMINAIRE PHOTOMETRIC (TEST REPORT)**

**ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 11,722.9LM**

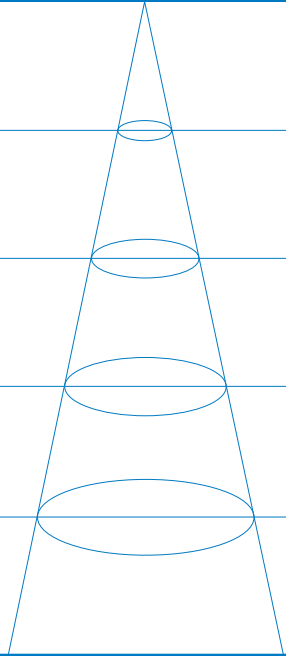2.29FT 0.7M	10,440.67LX		5.24FT 1.6M
4.26FT 1.3M	2,610.17LX		10.49FT 3.2M
6.56FT 2.0M	1,160.08LX		15.74FT 4.8M
8.85FT 2.7M	652.54LX		20.99FT 6.4M
10.82FT 3.3M	417.63LX		26.24FT 8.0M
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 100.6DEG</b>	<b>DIA</b>

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

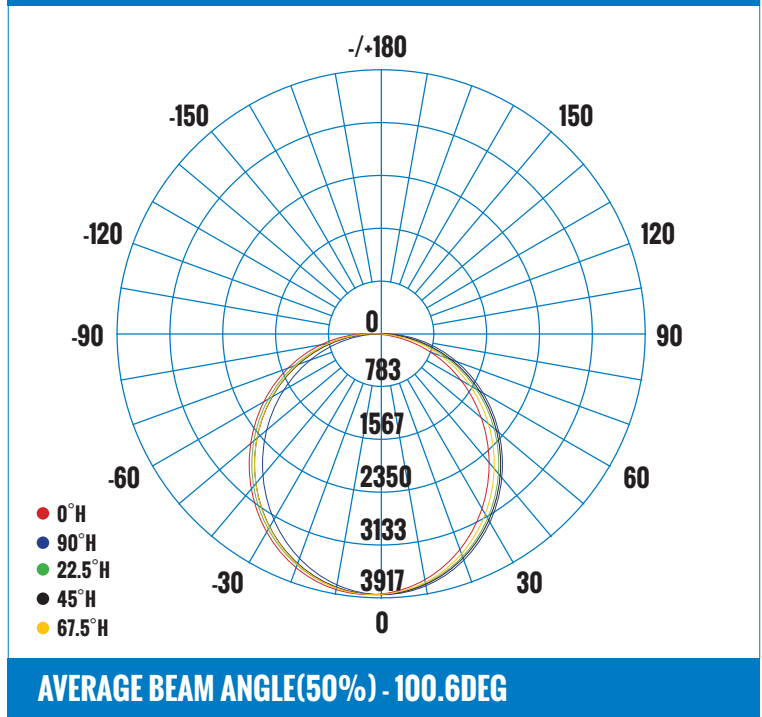


**CERTIFICATIONS**

**DRIVER/LED CHIP**



**MOUNTING OPTIONS/ACCESSORIES**

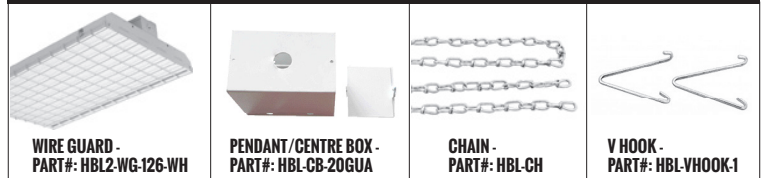

**ORDERING INFORMATION - HBL2 SERIES**

SERIES	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. HBL	2	110	U	4	0	WH
HBL - HIGH BAY LINEAR	2 - 2'	110 - 110W	U - 120-277V	4 - 4000K	0 - 0-10V CONTINUOUS DIMMING	WH - WHITE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com